


FORGED SWIVELS



EYE AND EYE

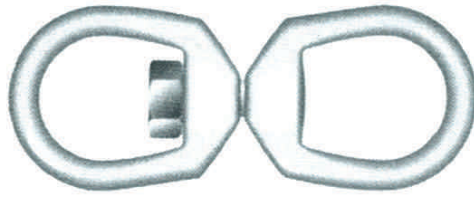

EYE AND JAW

Size (eye material) mm	Eye outside width mm	Eye inside width mm	Eye inside lengths mm	Eye-eye overall inside length mm	Jaw pin diameter mm	Jaw inside width mm	Jaw inside length mm	Eye-jaw overall inside length mm	Safe working load kg	Approx. weight kg
8	40	23	20/29	89	8	13	22	73	570	0,18
10	51	31	24/35	108	10	17	28	92	1020	0,32
12	62	35	32/46	137	12	21	34	115	1600	0,65
16	75	42	39/55	168	16	24	38	135	2400	1,12
20	88	49	43/64	185	20	30	45	154	3300	1,80
22	102	56	51/70	205	22	30	56	180	4500	2,80
24	113	60	55/82	240	28	45	72	220	5700	4,06
32	141	78	55/91	282	35	52	74	245	8000	7,44
38	183	101	115/155	445	50	76	114	380	20 000	24,89

— THESE SWIVELS ARE USED FOR POSITIONING ONLY —
 — FOR ROTATION UNDER LOAD, THRUST BEARING SWIVELS SHOULD BE USED —