

HARU®

RECOVERY FALL ARRESTOR

A range of retractable lifelines that reduces the shock loading on the body by limiting the distance of fall. Used in work inspection, general construction, maintenance, oil production, telecommunications, mining and confined work areas.

HARU® Fall Arrestors provide continuous protection against falls. The Fall Arrestor automatically extends and retracts to allow freedom of movement.

HARU® Fall Arrestors are manufactured in a ISO 9001:2008 factory and all products are CE approved.



FARFA

- Fall arrest mode or decent (rescue)
- Self-retracting SWR on drum with centrifugal brake
- Anti-ratcheting locking system
- Fall indicator
- Includes mounting bracket for tripod attachment

SPECIFICATIONS - FALL ARRESTORS/RETRIEVAL/RESCUE

Product Code	Type	Length (m)	Width/Ø (mm)	Weight (kg)	Working Load (kg)
FARFA15	Steel wire rope	15	4,8	11,8	150
FARFA35	Steel wire rope	35	4,8	18,6	150


CAUTION! Always read the instruction manual before use
Always wear the correct safety gear



SPECIFICATIONS - TRIPOD - EN795 APPROVED

Product Code	Material	Height (M)	Wire Dia. x Length	Safe Load (9 kg)	Weight (kg)
FATPC	Aluminium	1.35 - 2.40	5mm x up to max. 35m	150	20 (Excl. Rope)

- For confined space and rescue applications
- Adjustable height
- Additional cable pulley and point to attach to retractable lifeline
- For manhole max. diameter 1.5m and under
- Can be fitted with Haru Recovery Fall Arrestor

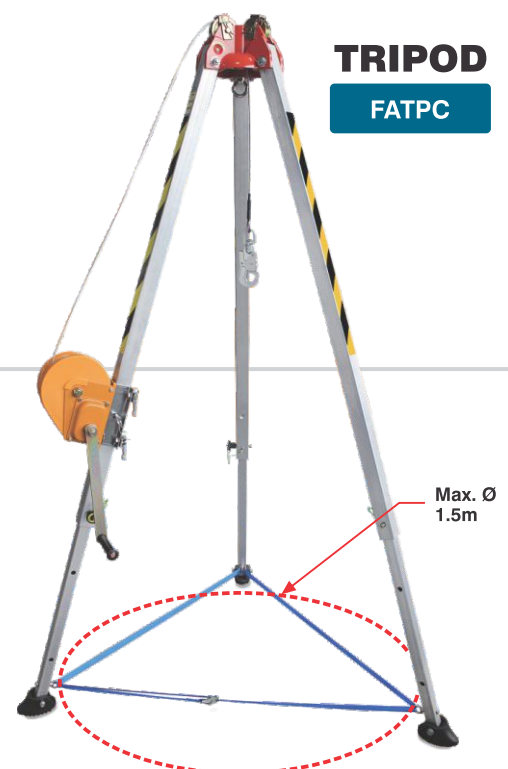

TRIPOD

FATPC